


The watersaver Pop flush is easy to install and very simple to set-up.

TO INSTALL:

1. Remove tank lid.
2. Snap pop Flush onto overflow tube directly above flapper valve as shown.

3. Flush toilet. To save more water raise ADJUSTER as shown. Proper setting is when minimal water is released and toilet flushes completely.

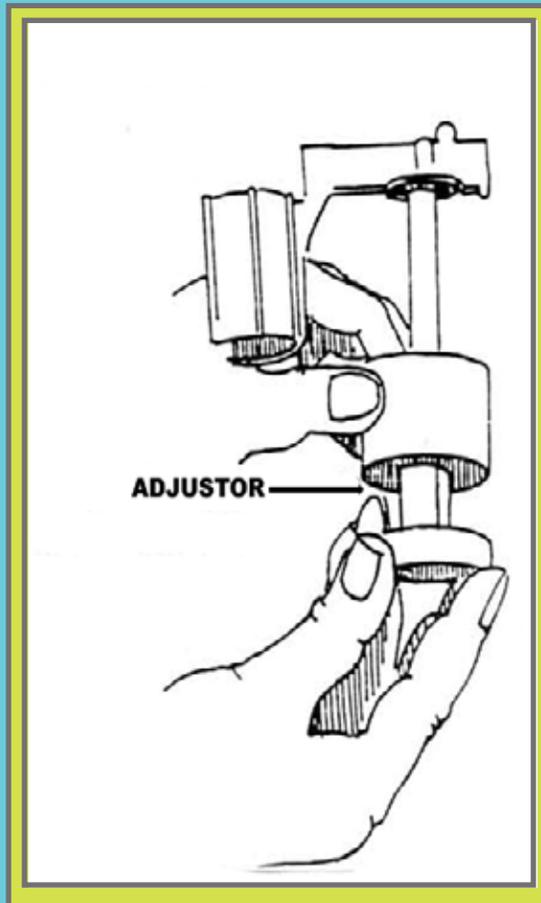

4. Replace tank lid,



The watersaver Pop Flush is an early flapper closure device. This ingenious little product is an inexpensive alternative to replacing your high consumption toilet. Savings range from 1.5 to 3 gal./flush.



The watersaver Pop Flush has a proven performance record. 10's of thousands have been installed across Canada & US. The Pop Flush is so durable we offer a ten year product guarantee.